

THE MOST TRUSTED BRAND IN
PERIMETER PROTECTION PROVIDER

PLYTEC



member of :



Certificate No: GT 0130-14
Increase Recycle Content
PLYTEC 380
PLYTEC 580
PLYTEC 680
PLYTEC 780

PLY TEC FENCING SYSTEM INDUSTRIES SDN. BHD. (579107-X)

(SUBSIDIARY OF SUDUT SWASTA SDN. BHD.) (447626-X)

No. 19, Jalan Meranti Permai 3,
Meranti Permai Industrial Park,
Batu 15, Jalan Puchong, 47100 Puchong,
Selangor Darul Ehsan, Malaysia.
Tel : + 603 - 8061 2888 | Fax : + 603 - 8061 4888
Mobile : + 6012 - 793 9288
Website : www.plytecfencing.com.my
Email : enquiry@ply-tec.com

JOHOR BAHRU BRANCH :
No. 2, Jalan Kempas 5/5,
Kawasan Perindustrian Tampoi Indah,
81200 Johor Bahru, Johor Darul Takzim, Malaysia.
Tel : + 607 - 234 0288 | Fax: + 607 - 234 0388
Mobile : + 6012 - 311 6652 (Ms. Choo)

MELAKA BRANCH :
No. 2794-2, Jalan PK 16,
Kawasan Perindustrian Krubong,
75260 Krubong, Melaka, Malaysia
Tel : + 606 - 336 0118 | Fax: + 606 - 336 0318
Mobile: + 6017 - 267 6968 (Mr. Tsng)



PLYTEC 380


Mesh Spacing (mm)	Vertical	Horizontal
	75	25
Wire Diameter (mm)	Ø3.5	
Panel Size Height x Width (mm)	1200 x 2400	
	1500 x 2400	
	1800 x 2400	
	2100 x 2400	
	2400 x 2400	
	2475 x 3100	
Post Specification (mm)	Option 1: RHS Post 60 x 40	
	Option 2: SHS Post 60 x 40 (c/w Flat Bar 38 & M8 Carriage Bolt & Nut)	



PLYTEC 480

W - Profile Fencing

Part Name	Specification
Post RHS Section	50mm x 50mm 60mm x 60mm 65mm x 65mm
Rail Section (L-Angle)	38mm x 38mm
Pale Section: W section	65mm +/- 5mm
Saddle Head M8 Bolts	M8 x 40mm
Cup Square M12 Bolts	M12 x 30mm

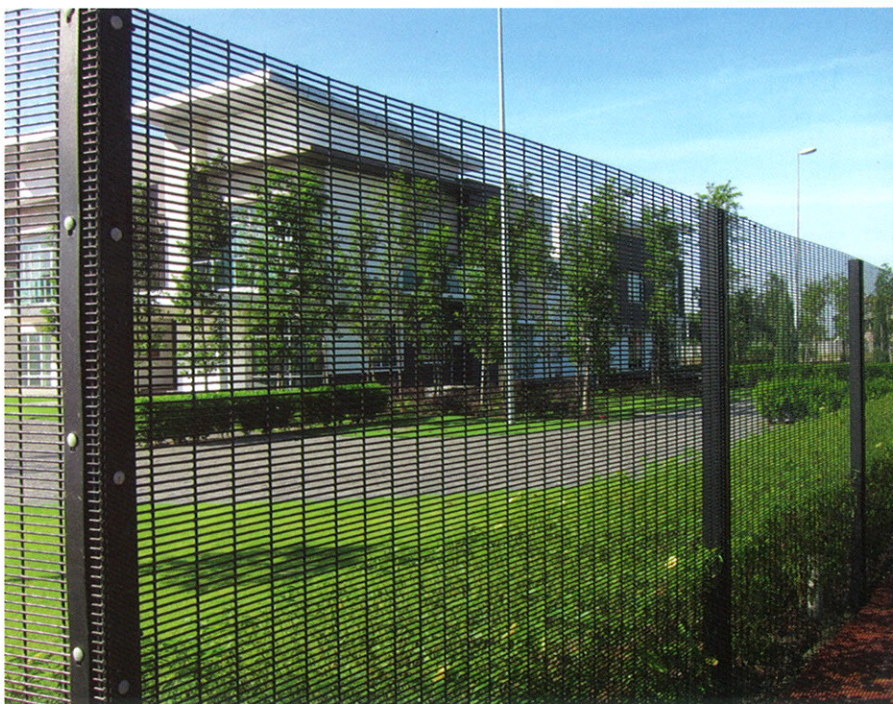

PLYTEC 580 (ANTI - CLIMB)

Mesh Spacing (mm)	Vertical	Horizontal
	12.5	75
Wire Diameter (mm)	Ø4.0	
Panel Size Height x Width (mm)	1500 x 2400	
	1800 x 2400	
	2100 x 2400	
	2400 x 2400	
	2700 x 2400	
	3000 x 2400	
Post Specification (mm)	Option 1: RHS Post 60 x 40	
	Option 2: SHS Post 60 x 40 (c/w Flat Bar 38 & M8 Carriage Bolt & Nut)	



PLYTEC 680A

Mesh Spacing (mm)	Vertical	Horizontal
	150	50
Wire Diameter (mm)	Ø5.0	
Panel Size Height x Width (mm)	900 x 2400	
	1200 x 2400	
	1500 x 2400	
	1800 x 2400	
	2100 x 2400	
	2400 x 2400	
Post Specification (mm)	-	
	-	
Post Specification (mm)	Ultragal Post Ø60 (Stainless Steel U-Clip & M6 Bolt & Nut)	



PLYTEC 680B

Mesh Spacing (mm)	Vertical	Horizontal
	300	75
Wire Diameter (mm)	Ø6.0	
Panel Size Height x Width (mm)	900 x 2400	
	1200 x 2400	
	1500 x 2400	
	1800 x 2400	
	2100 x 2400	
	2400 x 2400	
Post Specification (mm)	-	
	-	
Post Specification (mm)	Ultragal Post Ø60 (Stainless Steel U-Clip & M6 Bolt & Nut)	



PLYTEC 680C

Mesh Spacing (mm)	Vertical	Horizontal
	150/600/150	50
	150/900/150	
Wire Diameter (mm)	Ø5.0	
Panel Size Height x Width (mm)	900 x 2400	
	1200 x 2400	
Post Specification (mm)	Ultragal Post Ø60 SHS 50mm x 50mm (Stainless Steel Clip, M6 Bolts & Nuts)	



PLYTEC 780

Mesh Spacing (mm)	Vertical	Horizontal
	200	50
Wire Diameter (mm)	Ø5.0	
Panel Size Height x Width (mm)	930 x 2500	
	1230 x 2500	
	1530 x 2500	
	1830 x 2500	
	2130 x 2500	
Post Specification (mm)	Galvanized Option: Ultragal Post Ø60	
	Powder Coated Option: Interlocking System Peach Post 70 x 100 (Base Plate 140 x 140 w Capping)	



PLYTEC 880

Mesh Spacing (mm)	Vertical	Horizontal
	200	50
Wire Diameter (mm)	Ø5.0(Cross), Ø6.0 (Main)	
Panel Size Height x Width (mm)	830 x 2500	
	1230 x 2500	
	1630 x 2500	
	1830 x 2500	
	-	
	-	
	-	
Post Specification (mm)	Option 1: RHS Post 60 x 40 Option 2: SHS Post 60 x 60 Option 3: Ultragal Post Ø60	



PLYTEC 980 (TEMPORARY FENCE)

Mesh Spacing (mm)	Vertical	Horizontal
	150	75
Wire Diameter (mm)	Ø3.5	
Panel Size Height x Width (mm)	1200 x 2400	
	1500 x 2400	
	1800 x 2400	
	2100 x 2400	
	-	
Bracing Support Post (mm)	-	
	-	
Bracing Support Post (mm)	Post Diameter Ø32	
Footing Block (Concrete Weight)	610mm (L) x 230mm (W) x 150mm (H)	